




MODEL NO	BIA-SSF19	BIA-SSF24	BIA-SSF31
ITEM CODE			
Effective Filtration Area (ft ²)	2.1	3.14	4.9
Design Flow Rate (l/m)	159	235	371
Net Weight (kg)	10.5	16	31
Sand Required (kg)	80	136	230
Port Size (mm)	40	40	50
Max Temp (°C)	50	50	50
Maximum Working Pressure (kPa)	340	340	340

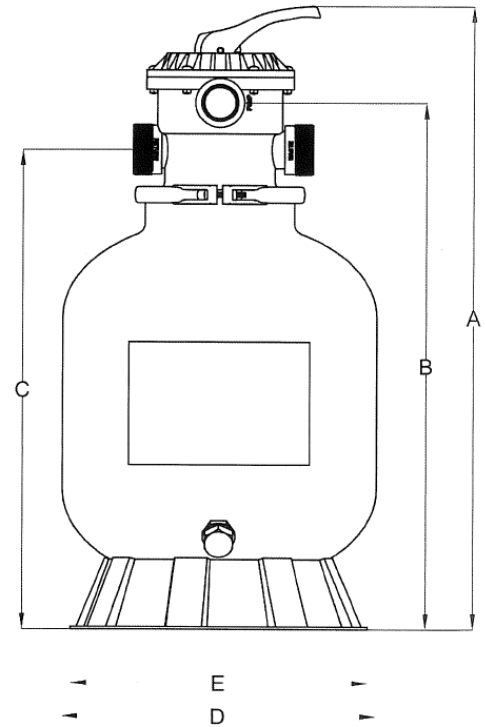

- * Flange clamp design allows any rotation of valve to plumbing
- * Corrosion proof and UV stabilised filter tank moulded of rugged material for dependable all weather performance
- * Specially designed drain for ease of serviceability
- * Precision designed self cleaning laterials for balanced flow, backwashing and ease of service
- * Comes complete with unions
- Suitable for use with Zeolite filter media.
- 10 YEAR WARRANTY ON TANKS
- 2 YEAR WARRANTY ON COMPONENTS

Dimensions	A	B	C	D	E
BIA-SSF19	930	805	745	485	480
BIA-SSF24	1100	985	925	610	480
BIA-SFF31	1258	1093	1017	790	590